

Reference:

Client:

Project:

Consultant:

Location:

Contractor:

Date:

Submitted by: BM



**BADR and ASFOUR**  
Engineering & Metal Industries

### Model FD-MB-3V-FA

Manual Quadrant, Multi-Blade Static Fire Damper  
Front Access & Out-of-Wall/Floor Application  
1-1/2 or 3 Hour, 3V Blade, UL-Classified

### Application:

The BAS/CSV model FD-MB-3V-FA is a multi-blade fire damper with 3V styleblades intended for installation outside the plane of a wall or floor with front (or grille) access to the quadrant. The FD-MB-3V-FA is used to prevent the spread of fire through a penetration in a fire rated barrier made by an HVAC duct or transfer. The FD-MB-3V-FA can be installed vertically (with blades running horizontally) or horizontally. The FD-MB-3V-FA can be installed in static systems (fans shut off in a fire) only.

### Standard Construction:

	Standard	Optional
<b>Frame Material</b>	20 Gauge (1) Galv. Roll-Formed Steel hat section w/ staked corners for integral bracing	-----
<b>Blade Material and Type</b>	16 Gauge (1.5) "3V" Galv. Roll-Formed Steel	Airfoil Galv. Steel (see Model FD-MB-AF-FA)
<b>Blade Sizes</b>	Min. width of 4.25" (108) to max. width of 7.25" (184)	-----
<b>Frame Depth</b>	5" (127)	-----
<b>Dimensions</b>	Actual - 1/4" (6)	Actual
<b>Axle Bearings</b>	Bronze Oilite (press fit into frame)	-----
<b>Axle Material</b>	Plated Steel	-----
<b>Linkage</b>	.125" (3.2) plated steel, Concealed in Frame	-----
<b>Sleeve</b>	16" x 20 gauge (406x1) galvanized steel	Wide variety of gauges and lengths available
<b>Thermal Blanket</b>	0.25" (6) thick thermal blanket 3 sides for vertical and 4 sides for horizontal applications	-----
<b>Front Access Panel</b>	Max. 6 inch. (152.4 mm), installed inside damper sleeve to conceal quadrant.	-----
<b>Heat Responsive Device</b>	UL Listed Fusible Link 165°F (74°C)	UL Listed Fusible Link 212°F (100°C)
<b>Blade Operator</b>	Manual Quadrant	Motorised [see Model FD-MB-3V-FA (M)]
<b>UL Hour Rating</b>	1-1/2 Hour	3 Hour

### Minimum & Maximum Sizes:

Multi-Blade Model	Minimum Size		Max. Single Section	
	1.5 Hour	3 Hour	1.5 Hour	3 Hour
FD-MB-3V-FA (Vertical)	12x12 (305x305)		36x48 (914x1219)	
FD-MB-3V-FA (Horizontal)				

All dimensions shown in inches, parentheses ( ) indicate millimeters.

**Consult CVS for Other Special Requirements.**

1 As part of our continuous improvement program, we reserve the right to make further improvements without notice.



### LISTINGS:


UL 555 Listing: R27700(UAE), R41135(KSA), R40068(Qatar), R41122(Egypt)

### STANDARDS MET:

NFPA Standards: 80, 90A, 92A, 92B and 101

Building Code Standard:

ICC International Building Code

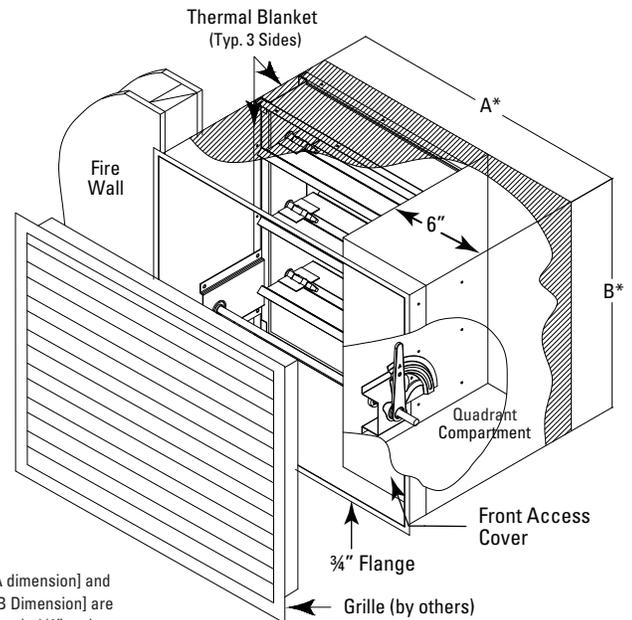

\*Width [A dimension] and \*Height [B Dimension] are approximately 1/4" undercut. Sleeved dampers are furnished approximately same size as given duct dimension plus 0.25" (6) for insulation.

### Optional Construction:

#### Factory Installed Sleeve:

Length: \_\_\_\_\_ (Std. 16" [406])

Gauge: 20 (1.0) 18 (1.2) 16 (1.5) 14 (2.0) 10 (3.5)


#### Framed Retaining Angles (FRA)

1-Side 2-Sides

#### Remote Control Box

RCB-1 RCB-2 RCB-3

Submittal

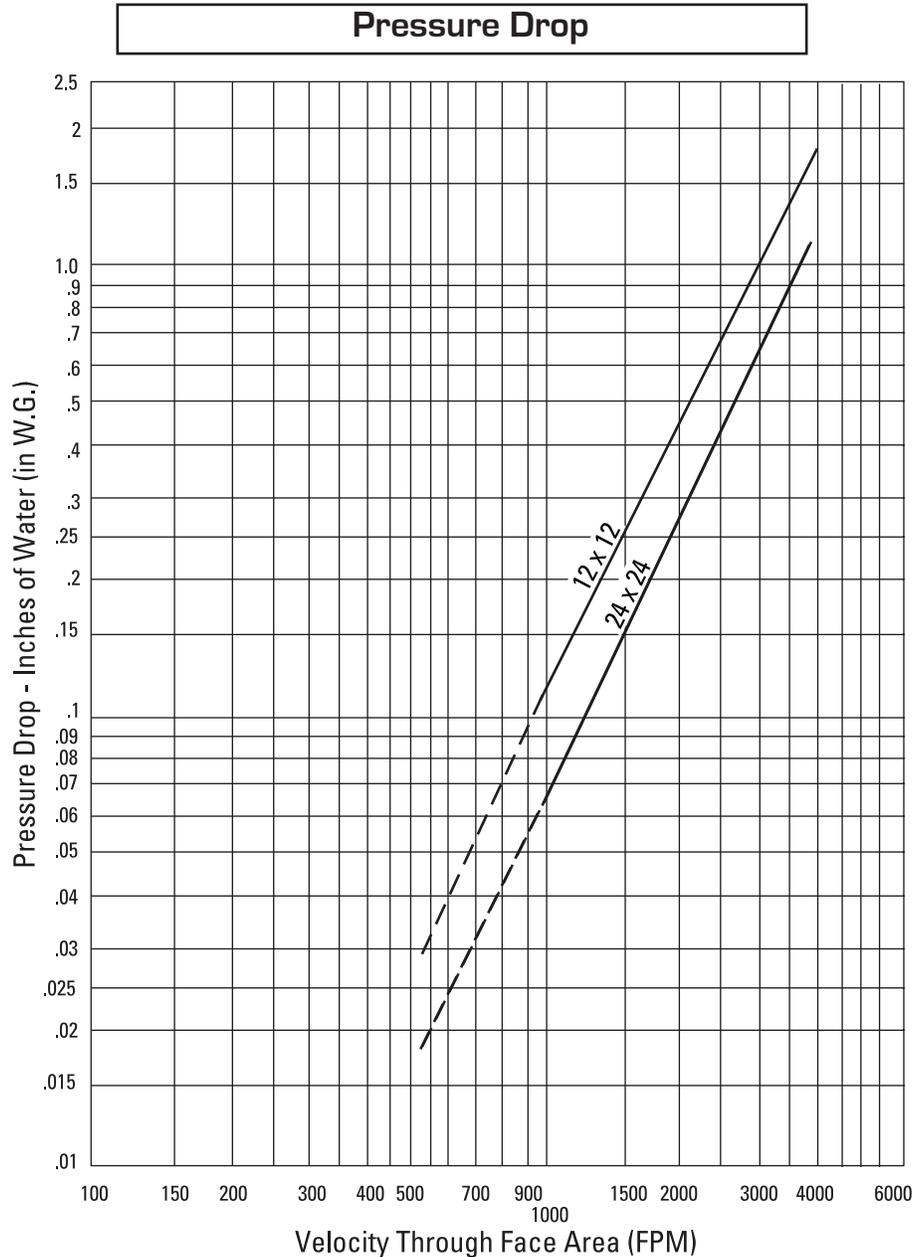


**To determine pressure drop:**

1. Locate the applicable face velocity on the bottom of the chart.
2. Move up the chart to the most appropriate size damper line.
3. From the intersection point, move left to determine the pressure drop.

**AMCA Figure 5.3 - Ducted Inlet and Outlet**

Pressure drop testing was performed by an independent laboratory to the AMCA Standard 500-D, Fig. 5.3 (ductwork upstream and downstream).



**Note:**

Pressure Drop for both sizes reflect damper face area only, and does not take into account the 6" deep quadrant compartment.


### Sleeve Requirements:

**Sleeve must be installed at the factory for out of wall/floor products.** As with all fire rated damper installations, the sleeve must fully penetrate the wall/floor being protected.

Sleeve length is dependent upon damper height, grille depth (including OBD) and quadrant selection:

- Standard clearance allowance for grille inset is 3" (76).
- Maximum sleeve length is 16" (406) plus the total wall depth.

**Sleeve is provided with a 3/4" (19) flange on the quadrant end of the sleeve by default.** Flange must be on top of barrier in horizontal installations.

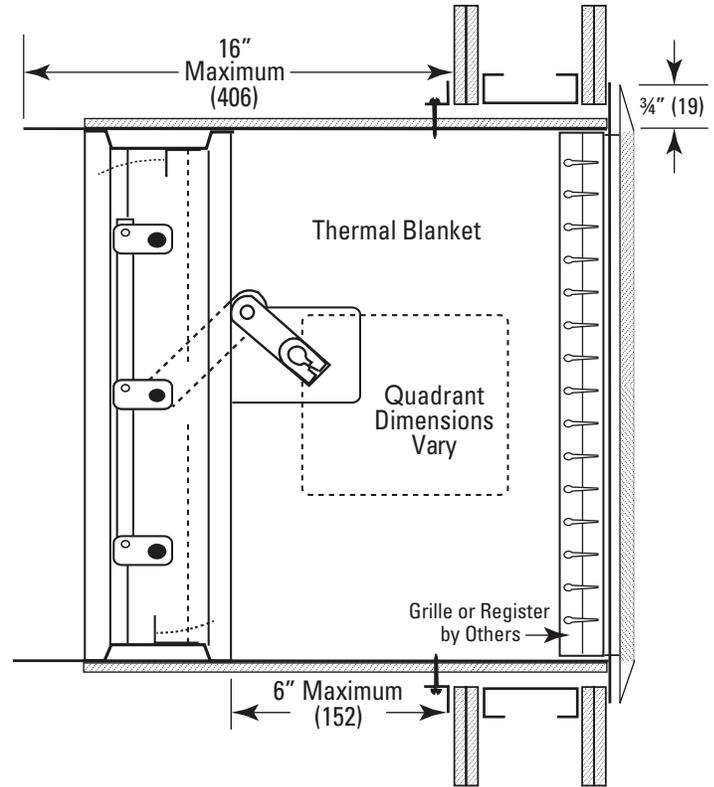

### Thermal Requirements:

A factory installed thermal blanket is provided on three sides (bottom excluded) for dampers ordered for vertical installation and on all four sides for dampers ordered for horizontal installation.

Due to the nature of the application for Out-of-Wall and Out-of-Floor Fire dampers, a 0.25" (6) thermal blanket is installed around the sleeve at the factory.

**This insulation is required as part of the UL Listing of the out of wall/out of floor assembly and must not be removed.**

Thermal Blanket provided 3 sides for Vertical and 4 sides for Horizontal.

### Top View

