

Reference:

Client:

Project:

Consultant:

Location:

Contractor:

Date:

Submitted by: BM



**BADR and ASFOUR**  
Engineering & Metal Industries

**Model FDD-MB-3V(M)**  
Motorised Dynamic Fire Damper  
Multi-Blade, 3V Blade  
1-1/2 or 3 Hour, UL555 Classified

**Application:**

The BAS/CVS model FDD-MB-3V(M) is a multi-blade motorised fire damper with 3V style blades. The FDD-MB-3V(M) is used to prevent the spread of fire through a penetration in a fire rated barrier made by an HVAC duct or transfer. The FDD-MB-3V(M) can be installed vertically (with blades running horizontally) or horizontally. The FDD-MB-3V(M) is intended to be installed in dynamic systems (fans stay on in a fire) and also can be installed in static systems (fans shut off in a fire). This model is most commonly used when required sizes exceed BAS/CVS's UL listing for the BAS/CVS Model FDD (dynamic curtain style fire damper). Refer to the Maximum and Minimum Size table on this page.

**MAXIMUM VELOCITY:** 2000 fpm (10.2 m/s)

**MAXIMUM PRESSURE:** 4" wg (1kPa)

**Standard Construction:**

	Standard	Optional
<b>Frame Material</b>	20 Gauge (1) Ga. Roll-Formed Steel hat section w/ staked corners for integral bracing	-----
<b>Blade Material and Type</b>	16 Gauge (1.5) "3V" Ga. Roll-Formed Galv. Steel	Airfoil Galv. Steel [see Model FDD-MB-AF(M)]
<b>Blade Sizes</b>	Min. width of 4.25" (108) to max. width of 7.25" (184)	-----
<b>Frame Depth</b>	5" (127)	-----
<b>Dimensions</b>	Actual - 1/4" (6)	Actual
<b>Axle Bearings</b>	Bronze Oilite (press fit into frame)	-----
<b>Axle Material</b>	Square, Plated Steel	-----
<b>Linkage</b>	.125" (3.2) plated steel, Concealed in Frame	-----
<b>Side Plate</b>	20 gauge side plate at one side only.	Wide variety of gauges and lengths available
<b>Heat Responsive Device</b>	Electric thermostat 165°F (74°C)	212° (100°C)
<b>UL Hourly Fire Rating</b>	1-1/2 Hour	3 Hour
<b>Blade Operator</b>	Motorised	Manual quadrant (see Model FDD-MB-3V)

**Minimum & Maximum Sizes:**

Multi-Blade Model	Minimum Size		Max. Single Section		Max. Multi-Section	
	1.5 Hour	3 Hour	1.5 Hour	3 Hour	1.5 Hour	3 Hour
<b>FDD-MB-3V (M) (Vertical)</b>	6x6 (152x152)		36x48 (914x1219)		108x96 (2743x2438)	72x96 (1829x2438)
<b>FDD-MB-3V (M) (Horizontal)</b>					72x96 (1829x2438)	72x96 (1829x2438)

All dimensions shown in inches, parentheses ( ) indicate millimeters.

Consult CVS for Other Special Requirements.



**LISTINGS:**


**UL 555 Listing:** R27700(UAE), R41135(KSA), R40068(Qatar), R41122(Egypt)

**STANDARDS MET:**

**NFPA Standards:** 80, 90A, 92A, 92B and 101

**Building Code Standard:**

ICC International Building Code

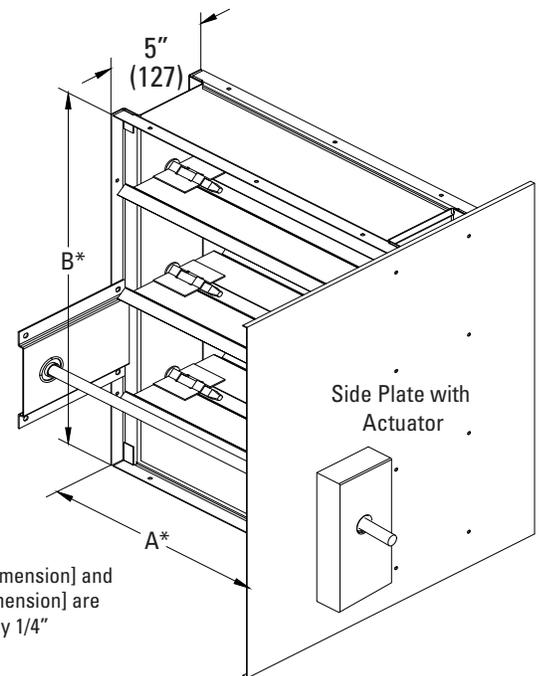

\* Width [A dimension] and Height [B dimension] are approximately 1/4" (6) undercut.

**Optional Construction:**

**Factory Installed Sleeve**

**Gauge:** 20 (1.0) 18 (1.2) 16 (1.5) 14 (2.0) 10 (3.5)

**Length:** \_\_\_\_\_ (16" (406) min. if actuator is req.)

**Flanged sleeve (requires factory installed external sleeve)**

3/4" (19) 1" (25)

**Framed Retaining Angles:** 16ga. x 1-1/2" x 1-1/2" (1.5 x 38 x 38)

Single Side Dual Side

**Actuators (Refer to UL Damper Actuator Reference Chart)**


**Type:** Electric: Model # \_\_\_\_\_ Pneumatic: Model # \_\_\_\_\_

**Location:** Right External (Std) Left External Internal

**Other Options:**

- Static models (see Model FD-MB-3V (M))
- Out-of-Wall models (see Model FDD-OW)
- True Round models (see Model FDD-RD)

**Pressure Drop**

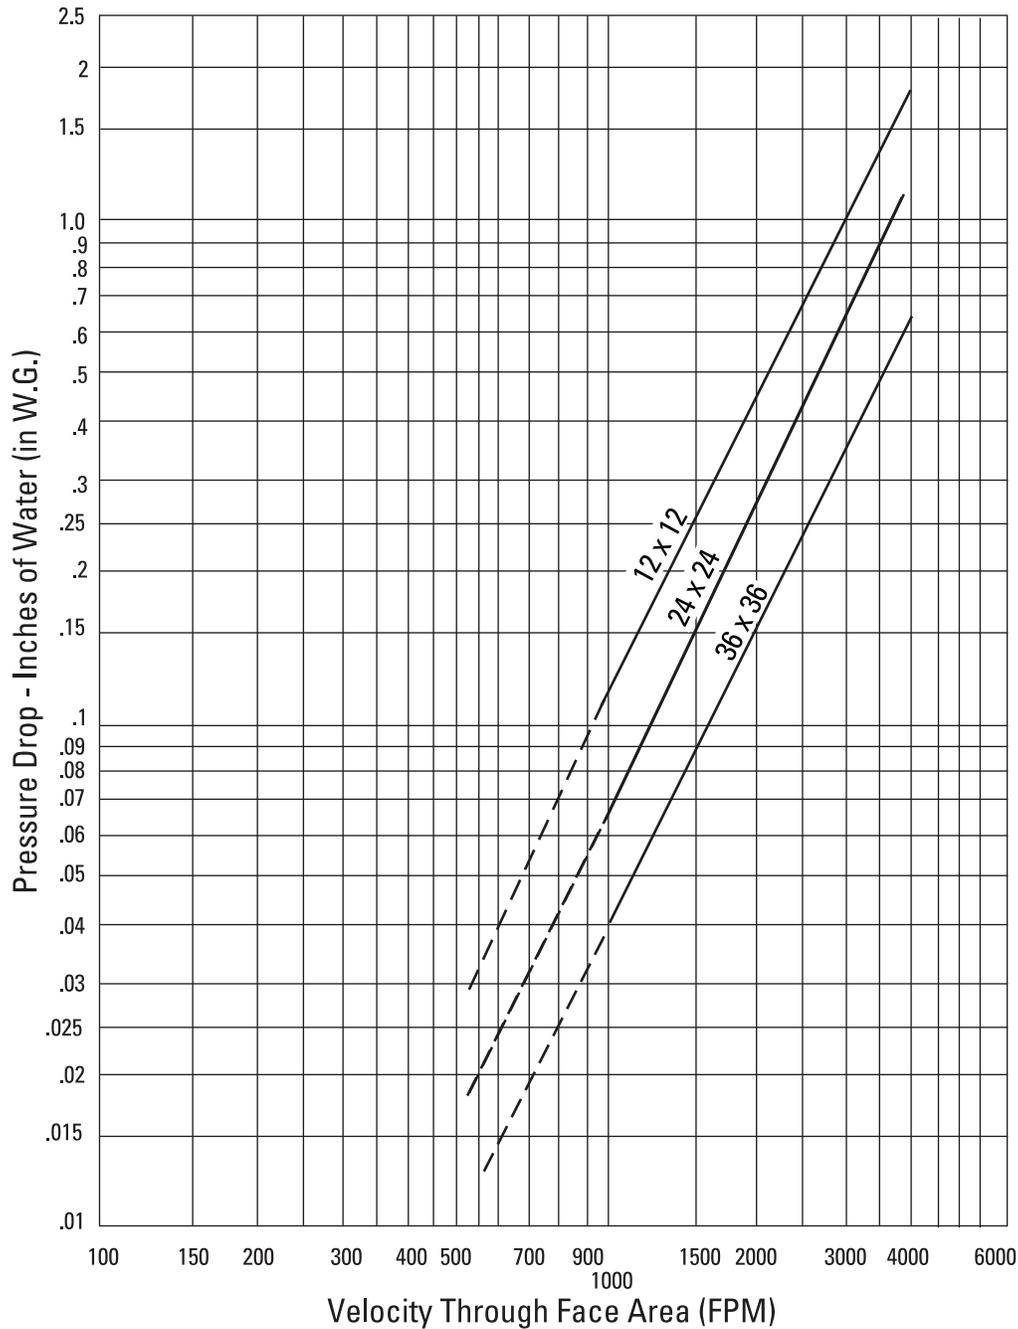


**To determine pressure drop:**

1. Locate the applicable face velocity on the bottom of the chart.
2. Move up the chart to the most appropriate size damper line.
3. From the intersection point, move left to determine the pressure drop.

**AMCA Figure 5.3 - Ducted Inlet and Outlet**

Pressure drop testing was performed by an independent laboratory to the AMCA Standard 500-D, Fig. 5.3 (ductwork upstream and downstream).

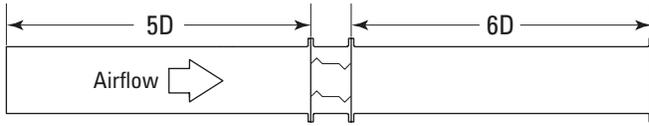

**Sleeve Requirements:**

Standard suggested sleeve depth is 16" (406), which is appropriate for use with up to a 6" deep (152) wall/floor and 2-sided mounting angle installation. (See Detail to the right).

When wall/floor thickness exceeds 6" (152), **add 1" (25) for each additional inch of wall thickness** to ensure sleeve fully penetrates the wall/floor. Each additional 1" (25) added will be added to the non-actuator side.

**The damper may be installed/rotated 180° as long as the blades run horizontally.**

The top of the damper is either side of the frame as long as the blades are running horizontally.


**Damper is not approved for installation with the blades running vertically.**

**The entire damper frame does not have to be installed in the plane of the wall/floor.**

The requirement is that the blade closure line (the center line of the 5" (127) damper frame) must be within the plane of the fire-rated wall/floor.

**Typical Sleeve Lengths**


Wall Thickness	Min. Sleeve Length
6 (152)	16 (406)
8 (203)	18 (457)
12 (305)	22 (559)
16 (406)	24 (610)

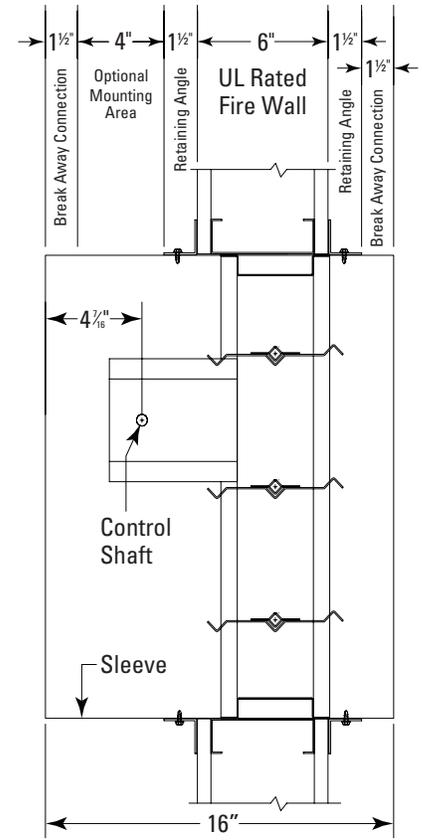

Sleeve Detail for Factory Mounted Sleeve

**Duct Connections/Sleeve Transitions:**



**FDD-MB-3V(M)**

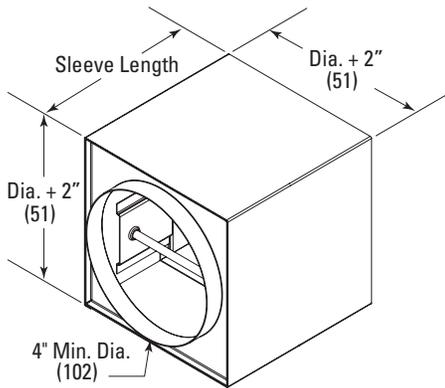

Square to Round transitions attached on both ends of the damper sleeve. Product is ordered on duct Diameter; damper will be fabricated 2" (51) larger in width and height. Collar extends 1.25" (32) beyond the sleeve length.

- **Minimum 4" (102) diameter, Maximum 94" (2388) diameter for Vertical and Horizontal mount for 1.5 Hour and 3 Hour fire rating.**

Rectangular to Oval or Square/Rectangular to Square/Rectangular transitions attached on both ends of the damper sleeve. Product is ordered on width and height of duct connection required; damper will be fabricated 2" (51) larger in width and height. Collar extends 1.25" (32) beyond the sleeve length.

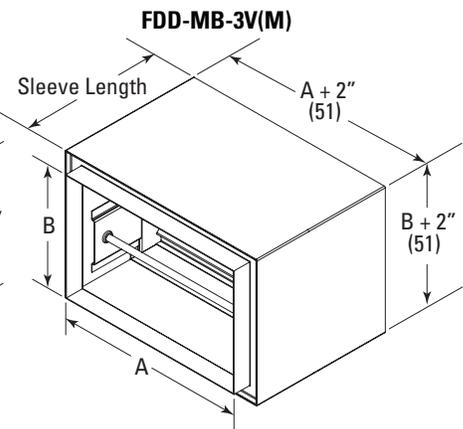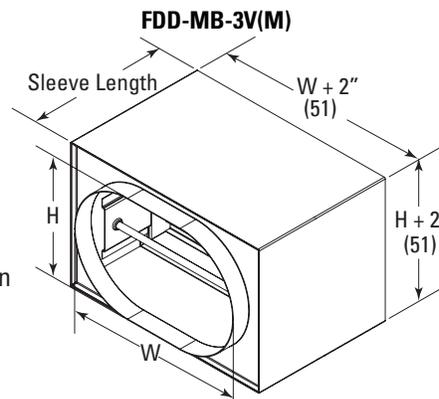

A= Duct Width  
B= Duct Height

- **Minimum 4" w x 4" h (102 x 102), Maximum 106" w x 94" h (2692 x 2388) for Vertical 1.5 Hour mount, 70" w x 46" h (1778 x 1168) for Horizontal 1.5 Hour mount and 70" w x 46" h (1778 x 1168) for Vertical or Horizontal 3 Hour mount.**