



HIGH PERFORMANCE 2" FIXED LOUVER MODEL FL-D-2

STANDARD CONSTRUCTION:

Frame: .060 Extruded Aluminum, 2.16" Deep

Blade: .060 Extruded Aluminum positioned on a 37° angle on approximately 1.47" centers


Birdscreen: .75" x .051" Flattened Aluminum in removable frame. Screen is mounted as standard on inside (rear) as looking from exterior of building.

Finish: Mill Aluminum (Std.)

Minimum Size: 12 x12



Maximum Single Section: 120"w x 84"h or 84"w x 120"h

Note: 10' max width

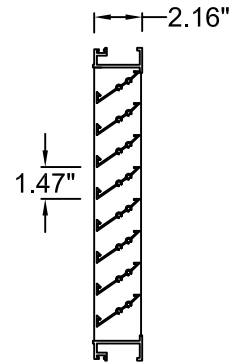

OPTIONS:


- ☐ Flanged Frame (1.50" std.), (1" std for shapes R_)
- ☐ Custom Flange (1", 2" , or 3"), (1.5", 2", or 3" for shapes R_)
- ☐ Extended Sill
- ☐ Glazing Adapter (.50" or .75")
- ☐ Insect Screen (Other Screens Available, See Screen Page)
- ☐ Filter Racks (no screen)
- ☐ Security Bars
- ☐ Hinged Sub Frame
- ☐ Welded Construction (Wind Load +/- 50 psf)
- ☐ Blank-off, Alum., non-insulated, no screen, non-removeable
- ☐ Blank-off, Alum., non-insulated, with bird screen or insect screen
- ☐ Blank-off, Alum., insulated double wall, with bird screen, removable
- ☐ Blank-off, Alum., insulated double wall, no screen, non-removeable

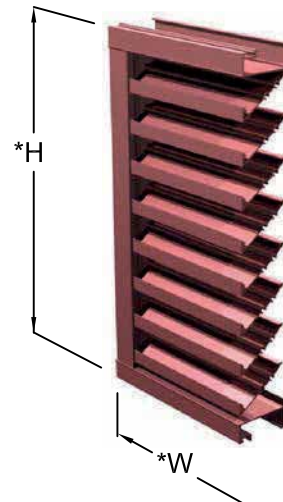


OPTIONAL FLANGE
(except R_ Shapes, 1" optional std)

AVAILABLE FINISHES:

- ☐ **Powder Polyester TGIC** (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2603 Standards
 - ☐ **Powder Super durable polyester** (2 coats) baked on at 410°F, 2.5 to 3.5 mils Meets AAMA-2604-05 Standards
 - ☐ **Acrylic baked enamel** (ACRA-BOND® ULTRA) by AkzoNobel baked on at 350°F, 0.8 to 1.2 mils dry Meets AAMA-2603 Standards
 - ☐ **Kynar®** (ALUM*A*STAR®) 2 coats by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry Meets AAMA-2604-04 Standards
 - ☐ **Kynar 500®** or **HYLAR® 5000 70% TRINAR®** (2 coats) by AkzoNobel baked on at 450°F, 1.2 to 1.6 mils dry, Meets AAMA-2605-05 Standards
 - ☐ **Kynar 500®** or **HYLAR® 5000 (70% Tri-Escent II)** (2 coats) by AkzoNobel, a superior finish to other metallic or anodized finishes. A blend of mica, ceramic, and inorganic pigments creates subtle yet dazzling design that goes beyond metallic color without the requirement of a clear coat. 14 standard colors - custom colors available. Baked on at 415°F, 1.4 to 1.8 mils dry, meets AAMA 2605-05.
 - ☐ **Clear Anodize 204 R-1 Class II** (AA-C22A31)(0.4 to 0.7 mil)
 - ☐ **Clear Anodize 215 R-1 Class I** (AA-C22A41)(>0.7 mil)
 - ☐ **Integral Color Anodize** (AA-C22A42)(>0.7 mil)
- Clear coat available for all above finishes.
 - Hylar® 5000 is a registered trademark of Solvay Solexis, Inc.
 - Kynar® 500 is a registered trademark of Arkema.
 - ALUM*A*STAR® 50 and TRINAR® are registered trademarks of AkzoNobel
 - ACRA-BOND® ULTRA is a registered trademark of AkzoNobel





OPTIONAL
GLAZING ADAPTER



OPTIONAL
EXTENDED SILL

*Width and Height dimensions are approximately 1/4" under listed size.

MODEL FL-D-2
HIGH PERFORMANCE 2" FIXED LOUVER

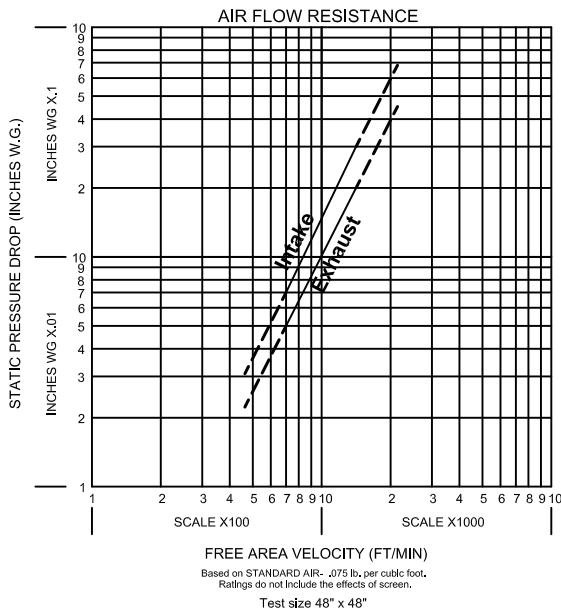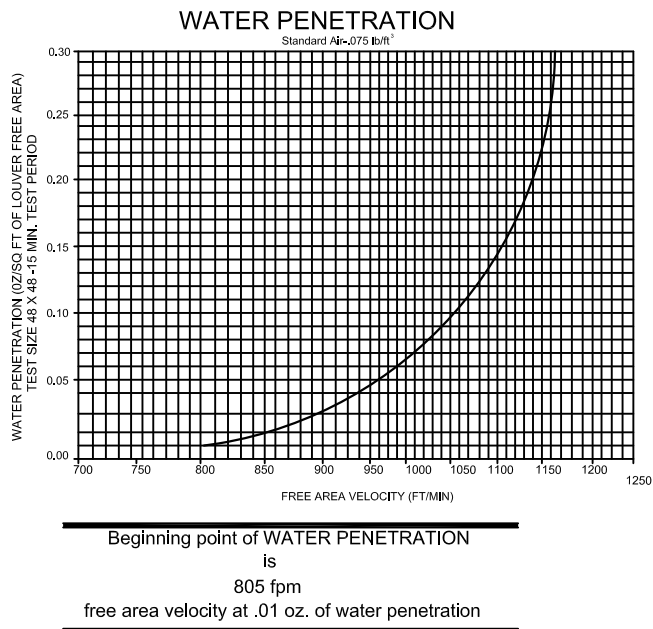

FREE AREA CHART (SQUARE FEET)

Louver Height	Louver Width In Inches																			Louver Height
Inches	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	Inches
12	0.33	0.54	0.74	0.95	1.16	1.36	1.57	1.77	1.98	2.18	2.39	2.59	2.80	3.00	3.21	3.41	3.62	3.82	4.03	12
18	0.57	0.92	1.27	1.63	1.98	2.33	2.68	3.03	3.38	3.74	4.09	4.44	4.79	5.14	5.49	5.85	6.20	6.55	6.90	18
24	0.81	1.31	1.81	2.30	2.80	3.30	3.80	4.30	4.79	5.29	5.79	6.29	6.79	7.28	7.78	8.28	8.78	9.28	9.77	24
30	1.11	1.79	2.47	3.15	3.83	4.52	5.20	5.88	6.56	7.24	7.93	8.61	9.29	9.97	10.65	11.33	12.02	12.70	13.38	30
36	1.35	2.19	3.02	3.85	4.69	5.52	6.35	7.19	8.02	8.85	9.69	10.52	11.35	12.19	13.02	13.85	14.69	15.52	16.35	36
42	1.60	2.58	3.57	4.55	5.54	6.52	7.51	8.49	9.48	10.46	11.45	12.43	13.42	14.40	15.39	16.37	17.36	18.34	19.33	42
48	1.85	2.98	4.12	5.26	6.39	7.53	8.66	9.80	10.94	12.07	13.21	14.35	15.48	16.62	17.75	18.89	20.03	21.16	22.30	48
54	2.09	3.38	4.67	5.96	7.24	8.53	9.82	11.11	12.39	13.68	14.97	16.26	17.55	18.83	20.12	21.41	22.70	23.98	25.27	54
60	2.34	3.78	5.22	6.66	8.10	9.54	10.97	12.41	13.85	15.29	16.73	18.17	19.61	21.05	22.49	23.93	25.37	26.81	28.25	60
66	2.53	4.09	5.65	7.21	8.77	10.33	11.89	13.45	15.00	16.56	18.12	19.68	21.24	22.80	24.36	25.92	27.48	29.03	30.59	66
72	2.77	4.48	6.18	7.89	9.59	11.30	13.00	14.71	16.41	18.12	19.82	21.53	23.23	24.94	26.64	28.35	30.06	31.76	33.47	72
78	3.01	4.86	6.71	8.56	10.42	12.27	14.12	15.97	17.82	19.67	21.52	23.38	25.23	27.08	28.93	30.78	32.63	34.49	36.34	78
84	3.25	5.24	7.24	9.24	11.24	13.24	15.23	17.23	19.23	21.23	23.23	25.22	27.22	29.22	31.22	33.22	35.21	37.21	39.21	84
90	3.48	5.63	7.77	9.92	12.06	14.21	16.35	18.49	20.64	22.78	24.93	27.07	29.22	31.36	33.50	35.65	37.79	39.94	42.08	90
96	3.72	6.01	8.30	10.59	12.88	15.18	17.47	19.76	22.05	24.34	26.63	28.92	31.21	33.50	35.79	38.08	40.37	42.66	44.95	96
102	4.02	6.50	8.97	11.45	13.92	16.40	18.87	21.35	23.82	26.30	28.77	31.25	33.72	36.20	38.67	41.15	43.62	46.10	48.57	102
108	4.27	6.89	9.52	12.15	14.77	17.40	20.03	22.65	25.28	27.91	30.53	33.16	35.79	38.41	41.04	43.67	46.29	48.92	51.55	108
114	4.51	7.29	10.07	12.85	15.63	18.41	21.18	23.96	26.74	29.52	32.30	35.07	37.85	40.63	43.41	46.19	48.96	51.74	54.52	114
120	4.76	7.69	10.62	13.55	16.48	19.41	22.34	25.27	28.20	31.13	34.06	36.99	39.92	42.85	45.78	48.71	51.63	54.56	57.49	120

SUGGESTED SPECIFICATION

Furnish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall be stationary drainable type with drain gutters in each blade and downspouts in jambs and mullions. Stationary drainable blades shall be contained within a 2.16" frame. Louver components (heads, jambs, sills, blades, and mullions) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall incorporate structural supports required to withstand a wind load of 30 lbs. Per sq. ft. (equivalent of a 110 mph).

Published louver performance data bearing the AMCA Certified Ratings Seal for Air Performance & Water Penetration must be submitted for approval prior to fabrication and must demonstrate pressure drop and water penetration equal to or less than the CVS model specified.

Louvers shall be model FL-D-2, 6063-T6 extruded aluminum construction as follows:
Frame: 2.16" deep, .060 nominal wall thickness.
Blades: .060 nominal wall thickness. Drainable.
Blades are positioned at 37-degree angle and spaced approximately 1.47" center to center.
Screen: .75" x .051" (19 x 1.3) expanded, flattened aluminum in removable frame.