
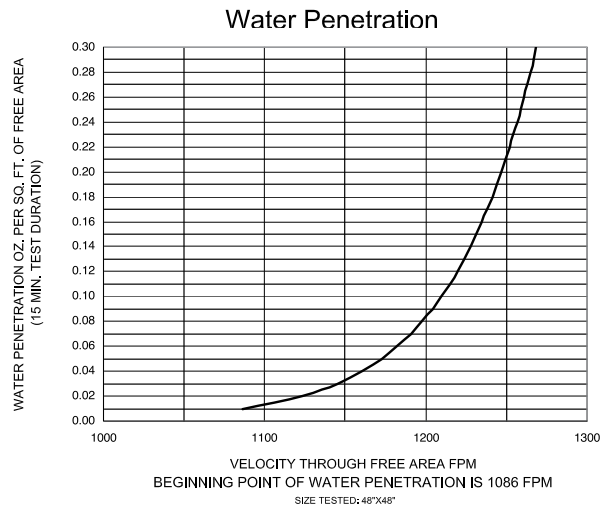


Model SED-4 Louver Performance Data

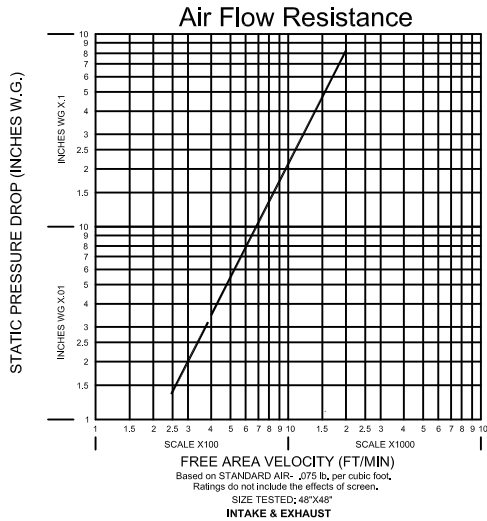

SED-4 FREE AREA IN SQ. FT.

Louver Height Inches	Width - Inches																			Louver Height Inches
	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	
12	0.17	0.28	0.38	0.48	0.59	0.69	0.80	0.90	1.00	1.11	1.21	1.32	1.42	1.52	1.63	1.73	1.84	1.94	2.04	12
18	0.34	0.55	0.76	0.97	1.17	1.38	1.59	1.80	2.01	2.21	2.42	2.63	2.84	3.05	3.25	3.46	3.67	3.88	4.09	18
24	0.51	0.83	1.14	1.45	1.76	2.07	2.39	2.70	3.01	3.32	3.63	3.95	4.26	4.57	4.88	5.19	5.51	5.82	6.13	24
30	0.68	1.10	1.52	1.93	2.35	2.76	3.18	3.60	4.01	4.43	4.84	5.26	5.68	6.09	6.51	6.92	7.34	7.76	8.17	30
36	0.86	1.38	1.90	2.42	2.94	3.46	3.98	4.50	5.02	5.54	6.06	6.58	7.10	7.62	8.14	8.66	9.18	9.70	10.22	36
42	1.03	1.65	2.28	2.90	3.52	4.15	4.77	5.40	6.02	6.64	7.27	7.89	8.52	9.14	9.76	10.39	11.01	11.64	12.26	42
48	1.20	1.93	2.65	3.38	4.11	4.84	5.57	6.29	7.02	7.75	8.48	9.21	9.93	10.66	11.39	12.12	12.85	13.57	14.30	48
54	1.37	2.20	3.03	3.87	4.70	5.53	6.36	7.19	8.03	8.86	9.69	10.52	11.35	12.19	13.02	13.85	14.68	15.51	16.35	54
60	1.54	2.48	3.41	4.35	5.28	6.22	7.16	8.09	9.03	9.96	10.90	11.84	12.77	13.71	14.64	15.58	16.52	17.45	18.39	60
66	1.71	2.75	3.79	4.83	5.87	6.91	7.95	8.99	10.03	11.07	12.11	13.15	14.19	15.23	16.27	17.31	18.35	19.39	20.43	66
72	1.88	3.03	4.17	5.31	6.46	7.60	8.75	9.89	11.03	12.18	13.32	14.47	15.61	16.75	17.90	19.04	20.19	21.33	22.47	72
78	2.05	3.30	4.55	5.80	7.05	8.29	9.54	10.79	12.04	13.29	14.53	15.78	17.03	18.28	19.53	20.77	22.02	23.27	24.52	78
84	2.23	3.58	4.93	6.28	7.63	8.99	10.34	11.69	13.04	14.39	15.75	17.10	18.45	19.80	21.15	22.51	23.86	25.21	26.56	84
90	2.40	3.85	5.31	6.76	8.22	9.68	11.13	12.59	14.04	15.50	16.96	18.41	19.87	21.32	22.78	24.24	25.69	27.15	28.60	90
96	2.57	4.13	5.69	7.25	8.81	10.37	11.93	13.49	15.05	16.61	18.17	19.73	21.29	22.85	24.41	25.97	27.53	29.09	30.65	96
102	2.74	4.40	6.07	7.73	9.39	11.06	12.72	14.39	16.05	17.71	19.38	21.04	22.71	24.37	26.03	27.70	29.36	31.03	32.69	102
108	2.91	4.68	6.45	8.21	9.98	11.75	13.52	15.29	17.05	18.82	20.59	22.36	24.13	25.89	27.66	29.43	31.20	32.97	34.73	108
114	3.08	4.95	6.83	8.70	10.57	12.44	14.31	16.19	18.06	19.93	21.80	23.67	25.55	27.42	29.29	31.16	33.03	34.91	36.78	114
120	3.25	5.23	7.20	9.18	11.16	13.13	15.11	17.08	19.06	21.04	23.01	24.99	26.96	28.94	30.92	32.89	34.87	36.84	38.82	120

Wind Driven Rain Performance -AMCA 500-L-

Test size 1m x 1m(39"x39")core
41³/₈"w x 41" h Nominal(1.05m x 1.04m)

75 mm/h (3 in/h) Rainfall & 13 m/s (29 mph) Wind Velocity				
Core Velocity fpm (m/s)	Airflow cfm (m ³ /s)	Free Area Velocity fpm (m/s)	Effectiveness Ratio	AMCA Effectiveness Class
0 (0.0)	0 (0.00)	0 (0.0)	99.5	A
137 (0.7)	1475 (0.70)	265 (1.3)	99.0	A
193 (1.0)	2077 (0.98)	373 (1.9)	98.3	B
281 (1.4)	3025 (1.43)	543 (2.8)	98.2	B
381 (1.9)	4101 (1.94)	736 (3.7)	98.1	B
471 (2.4)	5070 (2.39)	910 (4.6)	97.6	B
584 (3.0)	6286 (2.97)	1129 (5.7)	96.5	B
679 (3.4)	7309 (3.45)	1312 (6.7)	95.4	B

202.4 mm/h (8 in/h) Rainfall & 22 m/s (50 mph) Wind Velocity				
Core Velocity fpm (m/s)	Airflow cfm (m ³ /s)	Free Area Velocity fpm (m/s)	Effectiveness Ratio	AMCA Effectiveness Class
0 (0.0)	0 (0.00)	0 (0.0)	98.7	B
120 (0.6)	1292 (0.61)	232 (1.2)	98.0	B
175 (0.9)	1884 (0.89)	338 (1.7)	97.5	B
284 (1.4)	3057 (1.44)	549 (2.8)	97.0	B
406 (2.1)	4370 (2.06)	785 (4.0)	96.2	B
497 (2.5)	5350 (2.52)	960 (4.9)	95.5	B
578 (2.9)	6222 (2.94)	1117 (5.7)	95.2	B
683 (3.5)	7352 (3.47)	1320 (6.7)	93.1	C

Class	Discharge Loss Coefficient
1	0.4 and above
2	0.3 to 0.399
3	0.2 to 0.299
4	.0199 and below

* Discharge Loss Intake	
Wind Velocity (mph)	Class
29	3
50	3

(the higher the coefficient, the less resistance to airflow.)

* Discharge loss coefficient is the theoretical air flow of an opening divided by the actual flow rate of a louver the same size.

SED-4 Specifications

Furnish and install louver as hereinafter specified where shown on plans or as described in schedules. Louver shall be stationary type with horizontal rain resistant style blades positioned on approximately 2" centers within 4.162" deep frame. Louver frame and blade materials to be .081" thick 6063-T5 extruded aluminum. Sections up to maximum of 60"w x 96"h shall withstand wind loading of 30 lbs/sq.ft. (110 mph wind equivalent). Consult factory for welded construction and higher wind speeds. Louver shall meet the performance requirements established by the AMCA 500L test procedure and shall be licensed to bear the AMCA certified rating seal for water penetration, air performance, and wind driven rain. Louver shall have a minimum free area of 5.57 sq. ft. based on the standard 48"w x 48"h test specimen. Louver shall have a maximum static pressure drop of .20"(exhaust) & .20"(intake) water gage based on 1000 FPM free area intake velocity. Louver shall carry a minimum Class B water penetration classification based on a ventilation core of 679 FPM at a rainfall rate of 3" per hour and a 29 mph simulated wind velocity. Louver shall also carry a minimum class B water penetration classification based on a ventilation core velocity of 578 FPM at a rainfall rate of 8" per hour and a 50 mph simulated wind velocity.

Wind Driven Rain Penetration Classes	
Class	Effectiveness
A	1 to 0.99
B	0.989 to 0.95
C	0.949 to 0.80
D	Below 0.8